



CONFIGURATION AND KIT LIST

KIVA II



KIVA II

Date : 06/2016



CONFIGURATION AND KIT LIST


KIVA II

KIVA II KIT LIST


CONFIGURATION

		4 KIVA II 2 SB15m FOH	8 KIVA II FILL	12 KIVA II FOH 8dB/32Hz	16 KIVA II FOH 10dB/40Hz	16 KIVA II FOH 10dB/32Hz
KIVA II/SB15m SYSTEM						
LA4X	Amplified controller with PFC 4 x 1000 W /8 Ohms. Ethernet network. AES/EBU. C	1	1	4	4	6
L-CASE	2U Electronics transport and protection case	1	1	4	4	6
KIVA II	2-way passive WST enclosure: 2 x 6.5" LF + 1.75 HF diaphragm	4	8	12	16	16
SB15m	High power compact subwoofer: 1 x 15"	2	0	4	8	8
SP.7	Speaker cable: 4 x 4mm ² NL4 0.7m length	2	4	6	8	8
SP10	Speaker cable: 4 x 4mm ² NL4 10m length	4	4	0	8	0
SP25	Speaker cable: 4 x 4mm ² NL4 25m length	0	0	6	8	16
KIBU II	Rigging frame for flying or stacking KIVA/KIVAII	0	0	0	2	2
KIBU-SB	Rigging frame for flying or stacking KIVA and SB15m	0	0	4	2	2
KIET II	Rigging plate for ceiling or pole-mount of 3 KIVA/KIVA II maximum	2	0	4	4	4
KIVA-PULLBACK	Pullback accessory for KIVA/KIVA II	0	0	2	2	2
SB18m SYSTEM						
SB18m	High power compact subwoofer: 1 x 18"	0	0	4	0	8
SB18PLA	Removable front dolly on wheels for SB18/SB18m enclosure	0	0	4	0	8
SB18-COV	Protective cover for SB18(m) enclosure	0	0	4	0	8
SP.7	Speaker cable: 4 x 4mm ² NL4 0.7m length	0	0	0	0	0
SP10	Speaker cable: 4 x 4mm ² NL4 10m length	0	0	4	0	8
SP25	Speaker cable: 4 x 4mm ² NL4 25m length	0	0	4	0	0
TRAINING						
TRA-VOU1	1 day training valid for one participant	0	0	4	4	4
TOOLKIT						
TECH TOOL CASE	System technician tool case	0	0	0	1	1
SERVICE STARTER KIT KIVA II						
G03256	KR compression driver 1.75"	0	1	1	1	1
G03296	KR diaphragm 1.75"	0	1	1	1	1
G03257	KR loudspeaker low-frequency 6.5"	0	2	2	2	2
SERVICE STARTER KIT SB15m						
KR HPBC152	Kit HP BC152 Speaker 15"	0	0	1	1	1
SERVICE STARTER KIT SB18m						
KR HPBC183	Kit HP BC183 speaker 18" - 8 ohms	0	0	1	0	1
KR CAPLATPIN	Kit 10 pins for dolly boards	0	0	1	0	1


4 KIVA II FOH

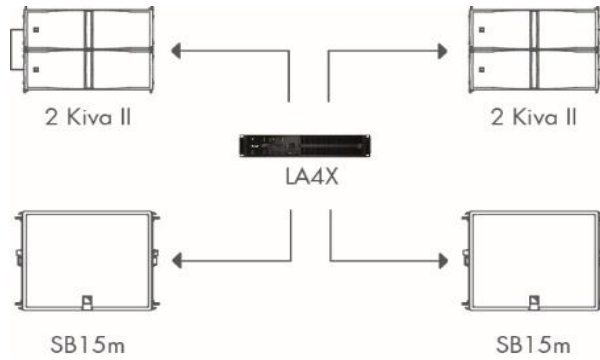


8 KIVA II FILL

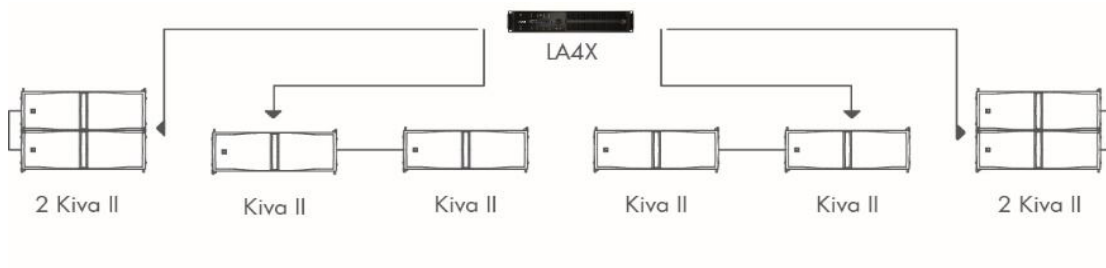

12 KIVA II FOH - CONTOUR 8dB - 32 Hz LF

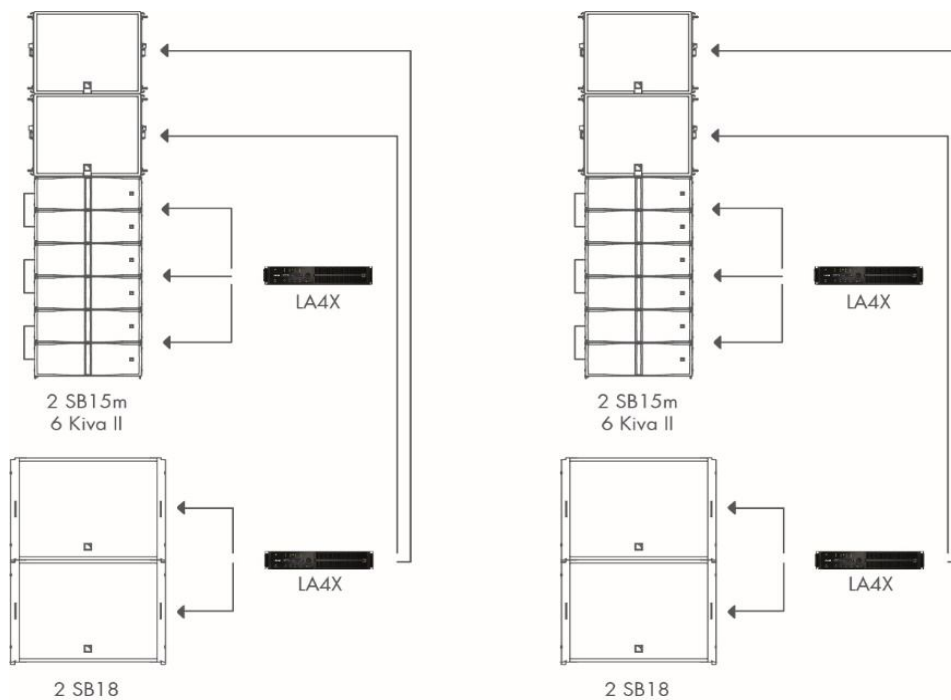

16 KIVA II FOH - CONTOUR 10dB - 40 Hz LF

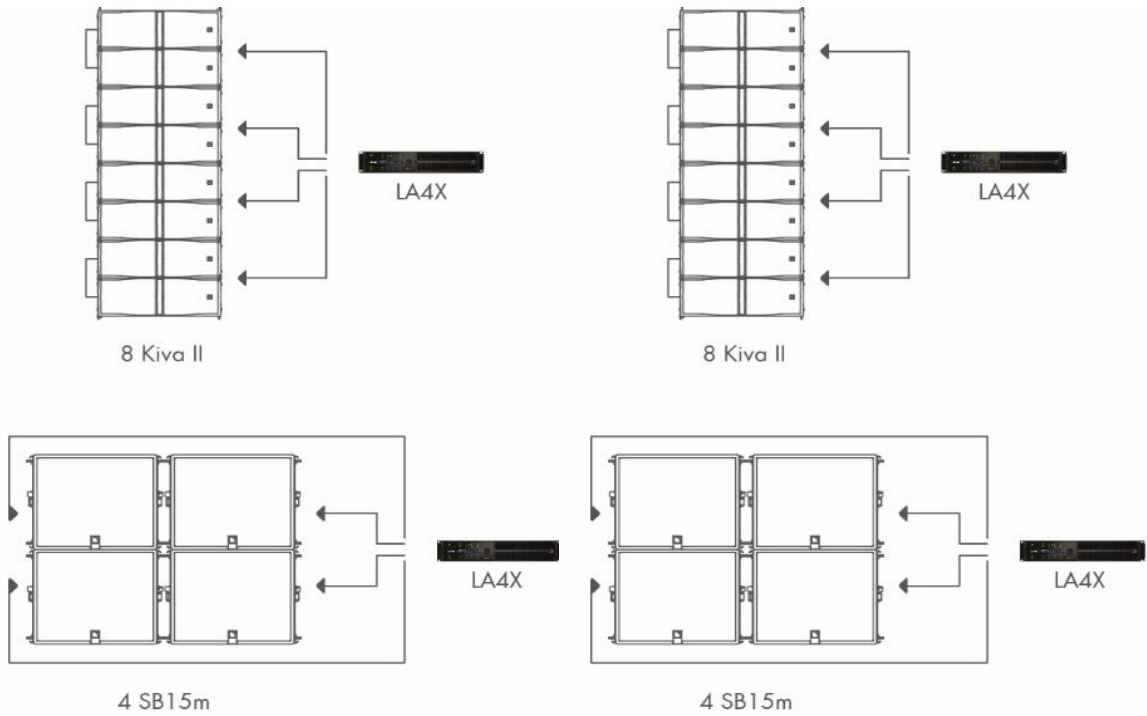

16 KIVA II FOH - CONTOUR 10dB - 32 Hz LF

