

# BT-BLINDER2 IP

## 05520

### DESCRIPTION

Powerful IP65 outdoor 2x 130W COB blinder with amber drift effect, behaves exactly like a halogen blinder!

### FEATURES

- Powerful 2x 130W COB blinder with amber drift effect, behaves exactly like a halogen blinder!
- Rugged die-cast ALU-housing with waterproof IP65 rating!
- Perfect for installation rainy conditions at the front of outdoor stages!
- Preprogrammed amber drift effect and/or separate control for white/amber!
- Tunable CCT: from 1650K to 3000K
- Very high CRI-factor (CRI 97) for perfect color rendering.
- Separate/combined pixel control !
- Can be used as LED-strobe (different modes)
- 4 DMX-modes, both 8bit and 16bit: from 4 to 10ch
- Control channel with remote DMX-control for "red shift", dimmer speed/curves, pixel order, fan speed, ...
- RDM-function for: channel mode, DMX-address, temperature monitoring, ...
- OLED display with backlit touch buttons for easy configuration, even in the dark.
- Easy truss installation, thanks to the fixing points for "omega bracket small" (code: 2677)
- Professional "line array" rigging hardware optionally available! (code: 5522)
- Easy daisy chaining: waterproof 5pin XLR + Neutrik® PowerCON TRUE1® in/out
- Optional modification kit available to modify IP 5pin XLR to 3pin (BT-XLR5TO3 KIT - code: 5517)
- 100V~240V 50/60Hz Power supply.




[www.briteq-lighting.com](http://www.briteq-lighting.com) | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.



## TECHNICAL SPECIFICATIONS

<b>General : Application</b>	Stage & Rental, Theatre
<b>General : Dimensions (cm)</b>	40x20x23
<b>General : Weight (kg)</b>	8.1
<b>General : Powerinput</b>	AC 100 - 240V, 50/60Hz
<b>General : Energy Label</b>	No
<b>General : Power consumption W</b>	310
<b>General : Color</b>	black
<b>General : Display</b>	OLED
<b>General : Fixation</b>	optional omega bracket
<b>General : IP rating</b>	outdoor
<b>Control : manual</b>	No
<b>Control : Master/Slave</b>	No
<b>Control : SMART-DMX</b>	No
<b>Control : Standalone</b>	no
<b>Control : programmable</b>	No
<b>Control : upgradable software</b>	Yes
<b>Control : maximum DMX channels</b>	10
<b>Light : lamp socket</b>	none
<b>Light : Lux</b>	350
<b>Light : lumen</b>	6500
<b>Light : lamp</b>	COB
<b>Light : min. color temperature (K)</b>	1650
<b>Light : max. color temperature (K)</b>	3000
<b>Light : CRI</b>	97
<b>Light : colors</b>	White, Warm white
<b>Light : mix colors</b>	No
<b>Light : iris</b>	No
<b>Light : min. beam angle (°)</b>	56
<b>Light : max. beam angle (°)</b>	56
<b>Light : min. refresh rate (kHz)</b>	3.6
<b>Light : max. refresh rate (kHz)</b>	3.6
<b>Connections : input</b>	5 pin XLR, TRUE1 powerCON
<b>Connections : output</b>	5 pin XLR, TRUE1 powerCON
<b>Brand</b>	BRITEQ
<b>EANCode</b>	5420025655200
<b>Discontinued</b>	No

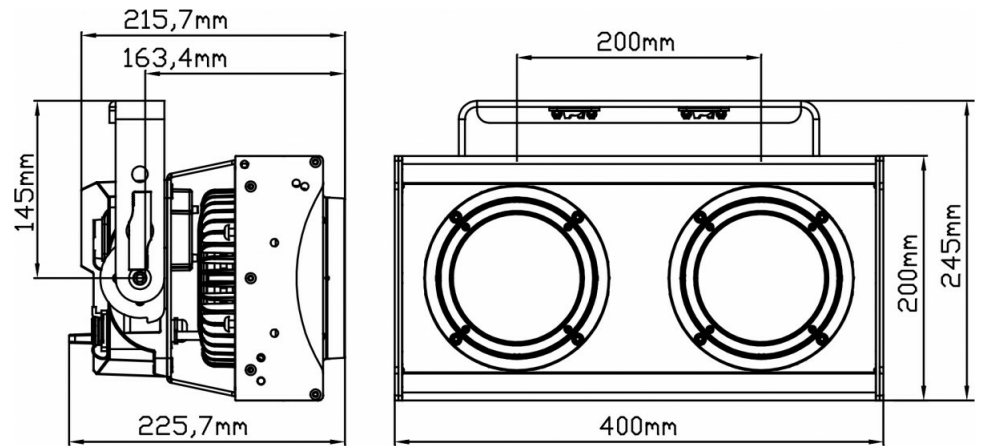

YOUR DEALER



[www.briteq-lighting.com](http://www.briteq-lighting.com) | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.